

# USER'S MANUAL

## INSTALLATION

- Base station:**
- Plug the small connector at the phone cable into the back of the base station (press the connector until you hear a click).
  - Plug the phone connector into the phone socket.
  - Plug the low voltage connector of the adapter into the backside of the phone, and plug the adapter into a 230 Volt mains socket.

- Handset:**
- Open the battery compartment of the handset, by sliding the battery cover down.
  - Insert the batteries into the battery compartment; at this, pay attention to the polarity (+ and -).
  - Slide the battery cover back onto the handset and place the handset on the base station.
  - Leave the handset continuously during 15 hours on the base station, to charge the batteries properly.

**Extra handsets and chargers:**  
If your phone has been delivered with multiple handsets, 2 batteries and a charger with adapter will be included for every handset. Plug the adapter of these chargers in a 230 Volt mains socket, insert the batteries into the handset(s) and place the handset(s) on the charger(s) to charge the batteries.

**ONLY CONNECT THE INCLUDED ADAPTER, CONNECTING OTHER ADAPTERS MAY RESULT IN DANGEROUS SITUATIONS OR MAY CAUSE DAMAGE TO THE ELECTRONICS OF THE PHONE.**


**INSERT ONLY RECHARGEABLE NIMH (NICKEL METAL HYDRIDE) BATTERIES. THE USE OF NOT RECHARGEABLE BATTERIES MAY CAUSE DANGEROUS SITUATIONS OR EXPLOSION HAZARD.**

Hereby, Hesdo declares that the radio equipment type Teleline TEL-170 is in compliance with directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:  
<http://DOC.hesdo.com/TEL-170-DOC.pdf>

Service Help

Belgium: (+32) (0) 32 38 5666  
Available on working days between 09:00 and 16:30

Spain: (+34) 910631852  
Available on weekdays from 09:00 to 14:30 and from 16:00 to 19:00 from Monday to Thursday and from 09:00 to 15:00 on Friday

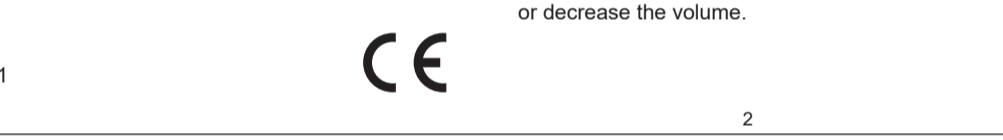

## OPERATION

- Answering calls:**
- Press the key phone-on to accept a call.

- Making calls:**  
**Block dialing:**
- Enter the phone number through the keyboard.
  - You can delete an incorrect entry with key C.
  - Press the phone-on key to dial the number.

- Direct dialing:**
- Press the phone-on key and wait for the dial tone.
  - Enter the phone number through the keyboard; this number will be dialed directly.

- End the call:**
- Press the key phone-off to end a call or place the handset back on the base station or charger.

- Key lock:**
- To enable the key lock, keep the key \* (STAR) pressed for more than 2 seconds.
  - To disable the key lock, keep the key \* pressed for more than 2 seconds again.

- Handset volume:**
- During the call, press the keys ▲ or ▼, to increase or decrease the volume.

**Announcements:**  
You can record your own announcements through the option [TAM SETTINGS] - [OGM SETTINGS] - [ANS & REC] or [ANSWER ONLY].

- Press [RECORD MESS] and press OK.
- Dictate your announcement after the beep into the microphone of the handset.
- After the maximum recording time of 180 seconds the recording is terminated (or press the key OK to terminate the recording prematurely) and the recording is played back once to check it.

You can listen to the announcement through the option [PLAYING].

When you press the key C during playback, your own announcement is deleted and the factory announcement will be active again.

**Playing recorded messages:**  
Through the handset:  
Select the option [MSG PLAYBACK], and press the key OK. You can adjust the volume with the keys ▲ and ▼.

The display shows the time and date of the concerning message. When it concerns a new message, a star will illuminate at the bottom center of the display of the handset.

Press the key OK during playback and use the keys ▲ and ▼ to listen to the next or previous messages, to delete the message or to stop playback.

You can also do this with the numerical keys on the handset:

- Key 4: repeat the message.
- Key 4 twice: play the previous message.
- Key 6: play the next message.
- Key 2: delete this message.
- Key 5: stop playback.

**Through the base station:**  
Press the key ► to start playback  
X = delete this message.  
■ = stop playback.

**Only announcement or announcement + recording message:**  
You can opt to answer every call by only playing the announcement, or the caller can leave a message after the beep. Select the option [TAM SETTINGS] - [ANSWER MODE] and choose from [ANS & REC] and [ANSWER ONLY].

**Setting the number of rings:**  
You can set the number of rings after which the answering machine accepts the call through the option [TAM SETTINGS] - [ANSWER DELAY]. See chapter 'Remote operation' for the setting [TIME SAVER].

**Setting of the maximum recording time:**  
You can limit the maximum recording time for message to 60 sec, 120 sec, 180 sec or unlimited through the option [TAM SETTINGS] - [RECORD TIME].

**Language of the factory announcements:**  
The answering machine factory has announcements in the English as well as the French language. You can select the desired language through the option [TAM SETTINGS] - [TAM LANGUAGE].

**Take over (handset only):**  
Press the key phone-on, on the handset to take over the call; the recording will be stopped.

**Enabling/disabling answering function (handset only):**  
You can enable or disable the answering function through the option [ANS. MACHINE] - [TAM ON/OFF]. The symbol illuminates on the display.

**Listening in (base only):**  
Select through the handset the option [TAM SETTINGS] - [BS SCREENING] to enable or disable the function listening in on the base station.

**Flash:**

- During the call press the key R to give a FLASH pulse.

**The interruption time of the FLASH pulse is adjustable; see for this the chapter PHONE SETTINGS.**

**Mute (microphone off):**

- To disable the microphone, shortly press the key C during the call.  
You can still hear the other party, but they cannot hear you.
- To enable the microphone again, shortly press the key C again.

**Search handset:**

- Shortly press the key on the base station.  
During 60 seconds, a signal will sound from the handset, and the word 'PAGING' flashes on the display of the handset. Press the key phone-off to end the signal prematurely.

**Call timer:**

- During the phone call, the elapsed call duration is displayed on the display.

**Quick key bell off:**

- To disable the bell of the handset, press key # during more than 2 seconds.
- To enable the bell again, press key # during more than 2 seconds.

## PHONE BOOK MEMORY

**Introduction:**  
Every handset has a phone book memory with a capacity of 50 phone numbers of at most 20 digits. You can program a name of at most 12 characters with each number.

The phone book memory in the handset is connected to the function Caller Identification. When you are called by somebody, whose name and number you have programmed in the memory, the name of this person is also displayed beside the number on the display of your handset. However, for this you need to subscribe to the service Caller Identification.

**Programming:**

- Press the key and twice the key OK successively.
- Enter the name through the keyboard (see the ABC on the dial keys).  
You can delete an incorrect input with key C.
- Enter the number through the keyboard.  
You can delete an incorrect input with key C.
- Press the key OK
- Select the desired VIP ring tone for this number, using ▲ and ▼.
- Press the key OK to store the memory.

**Dialing:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press on the phone key to dial this number.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

## ANSWERING MACHINE

**Introduction:**  
The TEL-170 is equipped with a digital answering machine that will accept a phone call in your absence and can record a message.

The total memory capacity of the answering machine is 15 minutes. You can use the answering machine directly after purchase. The announcements with which the caller is greeted have been preprogrammed at the factory. See below how you can record your own announcement.

If you have set the function [ANS & REC], the caller will have the chance to record a message. If you set the function [ANSWER ONLY], the connection will be disconnected after playing the announcement.

You can listen to and delete the recorded messages through the handset as well as through the base station; you need to set the various functions through the handset.

**Setting answering machine functions:**  
Setting and operating of the various answering machine functions through the handset is menu controlled. The menu structure of the answering machine looks as follows:

- Open the menu by pressing the key OK.
- Press the keys ▲ and ▼ to select the option [ANS. MACHINE].
- Press the key OK; you will access the menu answering machine:

- ANS. MACHINE
- MSG PLAYBACK
- DELETE ALL
- MEMO
- TAM ON/OFF
- TAM SETTINGS
- ANSWER MODE
- ANS & REC
- ANSWER ONLY
- TAM LANGUAGE
- OGM SETTINGS
- ANS & REC
- PLAYBACK
- RECORD MESS
- ANSWER ONLY
- PLAYBACK
- RECORD MESS
- ANSWER DELAY
- RECORD TIME
- REMOTE ACC.
- COMPRESSION
- BS SCREENING
- CHANGE PIN

**Enabling/disabling answering function (handset only):**  
You can enable or disable the answering function through the option [ANS. MACHINE] - [TAM ON/OFF]. The symbol illuminates on the display.

**Listening in (base only):**  
Select through the handset the option [TAM SETTINGS] - [BS SCREENING] to enable or disable the function listening in on the base station.

**Take over (handset only):**  
Press the key phone-on, on the handset to take over the call; the recording will be stopped.

**Flash:**

- During the call press the key R to give a FLASH pulse.

**The interruption time of the FLASH pulse is adjustable; see for this the chapter PHONE SETTINGS.**

**Mute (microphone off):**

- To disable the microphone, shortly press the key C during the call.  
You can still hear the other party, but they cannot hear you.
- To enable the microphone again, shortly press the key C again.

**Search handset:**

- Shortly press the key on the base station.  
During 60 seconds, a signal will sound from the handset, and the word 'PAGING' flashes on the display of the handset. Press the key phone-off to end the signal prematurely.

**Call timer:**

- During the phone call, the elapsed call duration is displayed on the display.

**Quick key bell off:**

- To disable the bell of the handset, press key # during more than 2 seconds.
- To enable the bell again, press key # during more than 2 seconds.

## PHONE BOOK MEMORY

**Introduction:**  
Every handset has a phone book memory with a capacity of 50 phone numbers of at most 20 digits. You can program a name of at most 12 characters with each number.

The phone book memory in the handset is connected to the function Caller Identification. When you are called by somebody, whose name and number you have programmed in the memory, the name of this person is also displayed beside the number on the display of your handset. However, for this you need to subscribe to the service Caller Identification.

**Programming:**

- Press the key and twice the key OK successively.
- Enter the name through the keyboard (see the ABC on the dial keys).  
You can delete an incorrect input with key C.
- Enter the number through the keyboard.  
You can delete an incorrect input with key C.
- Press the key OK
- Select the desired VIP ring tone for this number, using ▲ and ▼.
- Press the key OK to store the memory.

**Dialing:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press on the phone key to dial this number.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.

**Deleting the complete last number memory:**

- Press the key
- Press the key OK
- Select the option [DELETE ALL] with ▲ and ▼.
- Press the key OK twice, to delete the complete last number memory.

**Changes:**

- Press the key
- Search the desired memory, using keys ▲ and ▼.
- Press the key OK
- Search the option [EDIT] with the keys ▲ and ▼, press the key OK
- Use key C to delete the old name and enter the new name through the keyboard.