




## Air quality meter AQ25

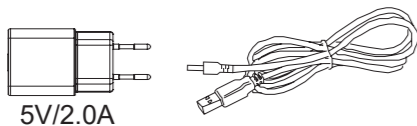



Comfort level indication  
Indication of particulate  
matter in the air  
Air quality index  
Temperature  
Humidity



Battery level indication  
Alarm activated  
Current time/alarm time  
Snooze icon ZZ  
AM/PM

**Note:** On the top of the AQ25 there's a touch-sensitive sensor.  
The keys at the back of the product don't work when the top of the AQ25 is touched.

### 1 On/off



Hold 5 sec.

### 2 Comfort level indication



Green  
  
0-50  
Optimal

Yellow  
  
101-150  
Bad

Blue  
  
51-100  
Good


Red  
  
151-999  
Serious pollution

### 3 Air quality index



Green/blue = Optimal  
Blue/yellow = Good  
Yellow/orange = Bad  
Orange/red = Serious pollution

### 4 Current time / alarm time




Current time  
9:30  
Flash  
Alarm time  
9:30  
No flash

### 5 Set current time

Flash  
(current time)

9:30




Hold until hours flash 9:30  
Set hours\*  
Minutes flash 9:30  
Set minutes\*  
Confirm

\* Press and hold and to set the time faster.

### 6 Set alarm time

No flash  
(alarm time)

9:30




Hold until hours flash 9:30  
Set hours\*  
Minutes flash 9:30  
Set minutes\*  
Confirm

\* Press and hold and to set the time faster.

### 7 Alarm on/off

No flash  
(alarm time)


9:30



Alarm icon  
Alarm ON  
Alarm OFF

### 8 Snooze alarm Z<sup>z</sup>



Beep  
Beep  
Beep  
Beep



Touch



Snooze 5min  
ZZ icon  
Auto stop 2min

## 9 Turn off alarm


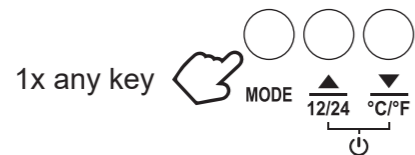



Auto on 24h

## 10 12/24 time

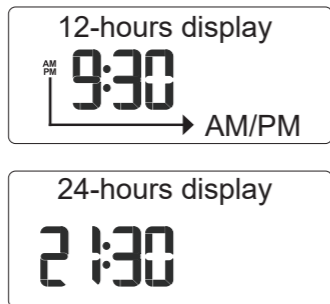

## 11 Degrees °C / °F



Displays **LL** ≤ -10°C (14°F). Displays **HH** ≥ 50°C (122°F).

## 12 Humidity





Range: 20-95%




Displays **LL** ≤ 20%.

Displays **HH** ≥ 95%.

## 13 Power by adapter

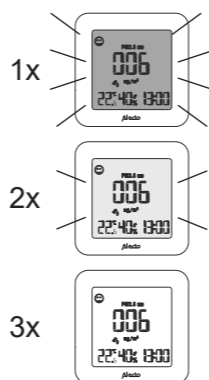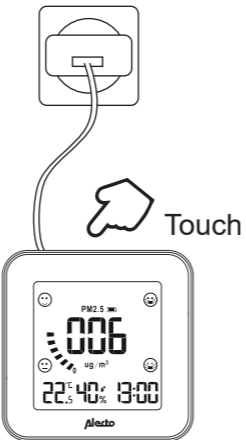


## Internal battery

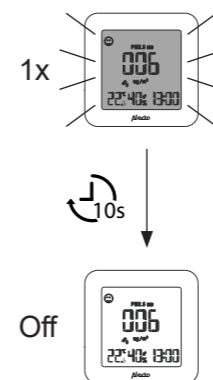

## 14 USB OUT



Phone charge

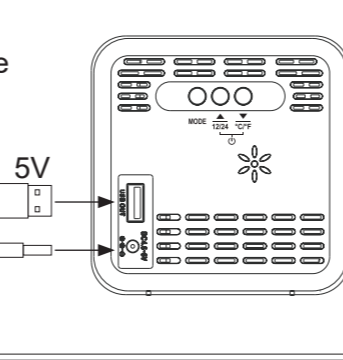

### Environment: (discarding this product)

When discarding this product, please return it to your retailer; they'll ensure environment-friendly processing. Exhausted batteries, if applicable, should be brought to your local collection point for small chemical waste.

### Technical specifications:

- Dimensions (HxWxD): 90 x 90 x 33 mm
- PM2.5 detection range: 0-999 µg/m³
- Temperature range: -10°C to 50°C (14°F to 122°F)
- Humidity range: 20% to 95%

### Information Power Adapter:

- Model Identifier: HJ-0502000W2-EU
- Input voltage: 100-240VAC
- Input AC frequency: 50/60 Hz
- Output voltage: 5.0V DC
- Output current: 2.0 A
- Output Power: 2.7 W
- Average active efficiency: 79.61 %
- No load Power consumption: 0.1 W

### Manufacturers name and address:

Shen Zhen Huajin Electronics Co., Ltd, Block E, Xinzhongqiao Industrial Park, Baolong six road, Baolong Industrial city, Longgang district, 518116 Shenzhen, China.

Hesdo BV  
Aziëlaan 12  
5232 BA, 's-Hertogenbosch  
The Netherlands